


P-Channel Enhancement Mode MOSFET

Feature


- -40V/-58A
 $R_{DS(ON)} = 11.4m\Omega(\text{typ.}) @ V_{GS} = -10V$
 $R_{DS(ON)} = 16.5m\Omega(\text{typ.}) @ V_{GS} = -4.5V$
- 100% Avalanche Tested
- 100% DVDS
- Reliable and Rugged
- Halogen Free and Green Devices Available
 (RoHS Compliant)

Pin Description

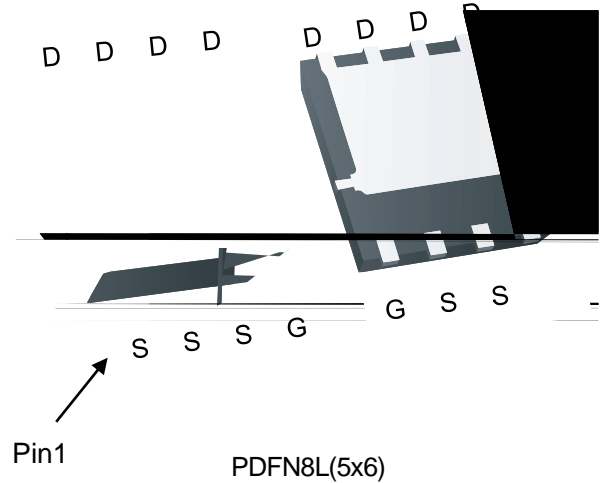

Applications

- Switching application
- Li-battery protection
- DC-DC
- Motor control



Single P-Channel MOSFET

Ordering and Marking Information

C2 HYG120P04 XYMXXXXXX	Package Code C2: PDFN8L(5x6) Date Code XYMXXXXXX
------------------------------	---

Note: HUAYI halogen free products contain molding compounds/die attach materials and 100% matte tin plate Termination finish; which are fully compliant with RoHS. HUAYI halogen free products meet or exceed the halogen free requirements of IPC/JEDEC J-STD-020 for MSL classification at halogen free peak reflow temperature. HUAYI defines "Green" to mean halogen free (RoHS compliant) and halogen free (Br or Cl does not exceed 900ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500ppm by weight).

HUAYI reserves the right to make changes, corrections, enhancements, modifications, and improvements to this product and/or to this document at any time without notice.

HYG120P04LQ1C2

HYG120P04LQ1C2

Typical Operating Characteristics

Figure 1: Power Dissipation

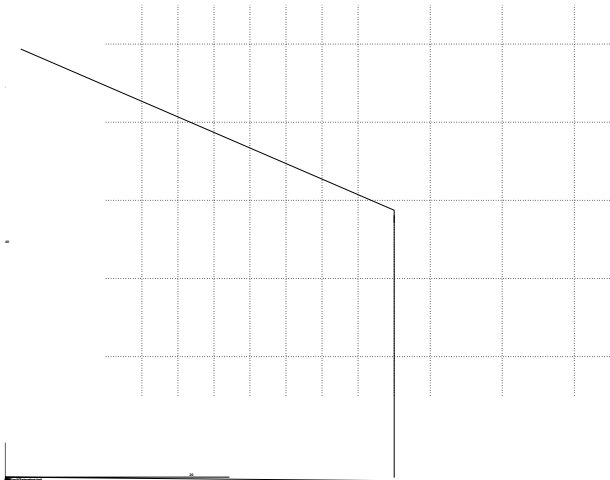


Figure 2: Drain Current



Figure 3: Safe Operation Area

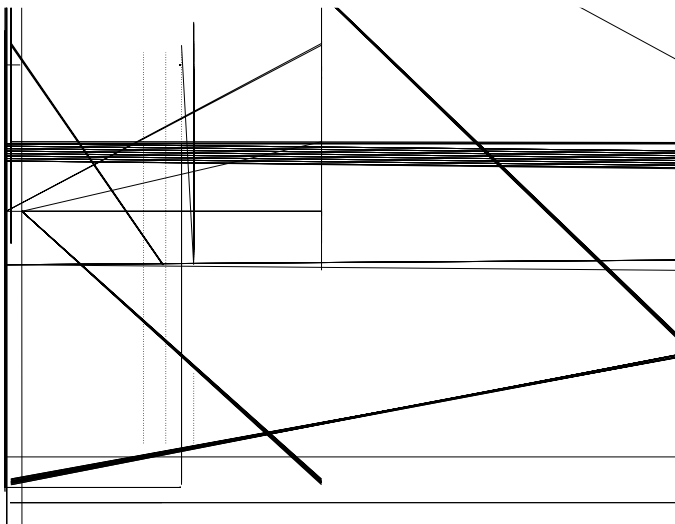


Figure 4: Thermal Transient Impedance




Figure 5: Output Characteristics


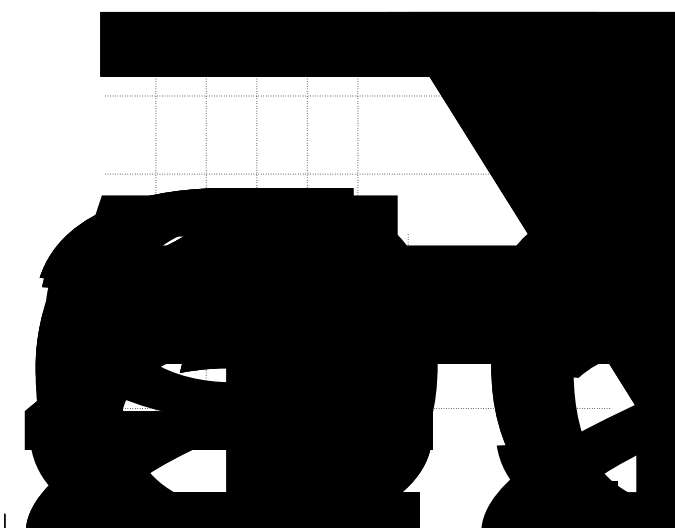


Figure 6: Drain-Source On Resistance

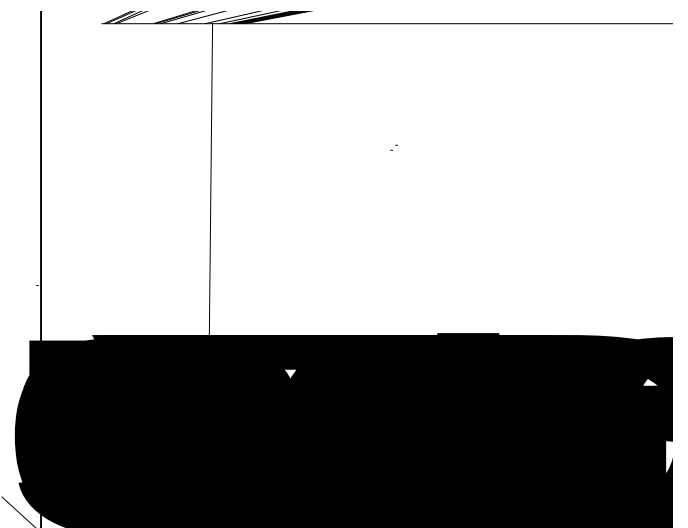

Typical Operating Characteristics(Cont.)

Figure 7: On-Resistance vs. Temperature



Figure 8: Source-Drain Diode Forward


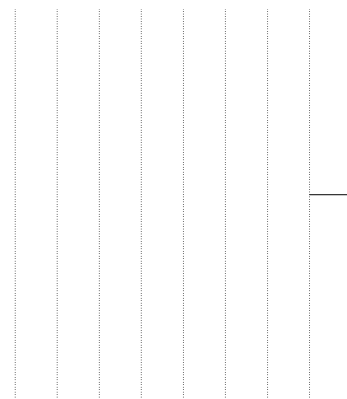




Figure 9: Capacitance Characteristics





Figure 10: Gate Charge Characteristics

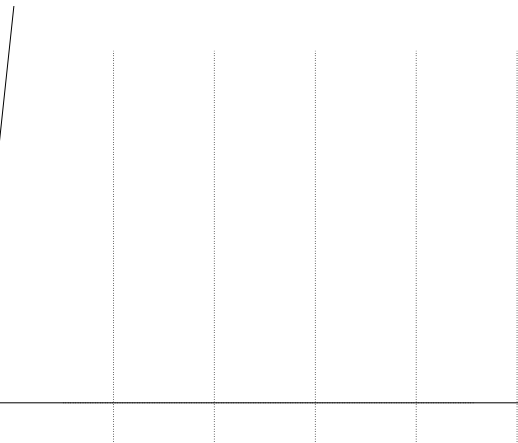



Avalanche Test Circuit

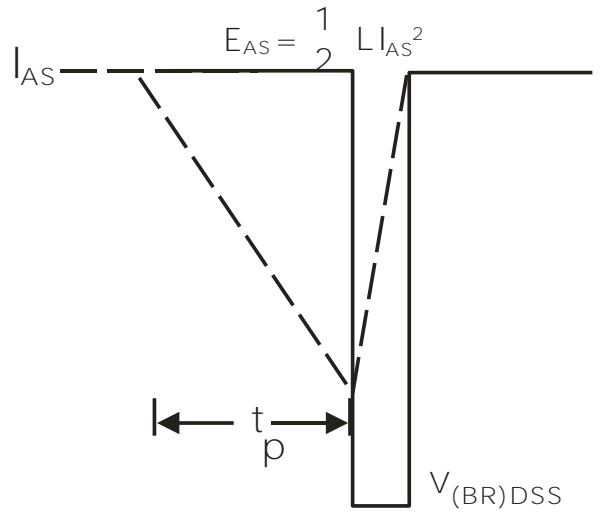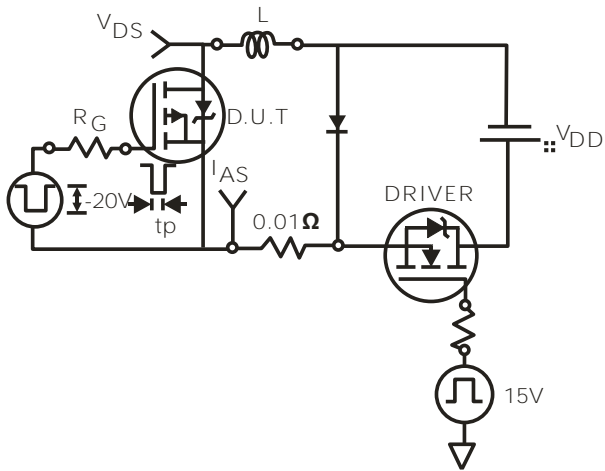

Switching Time Test Circuit

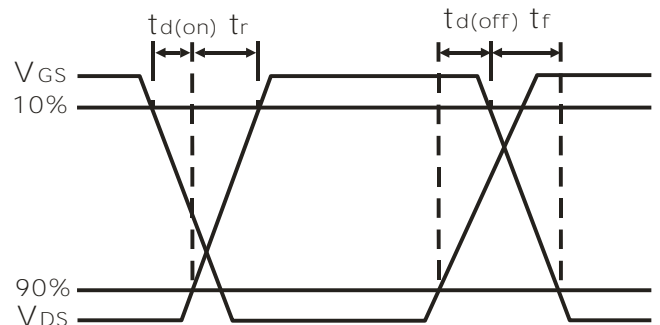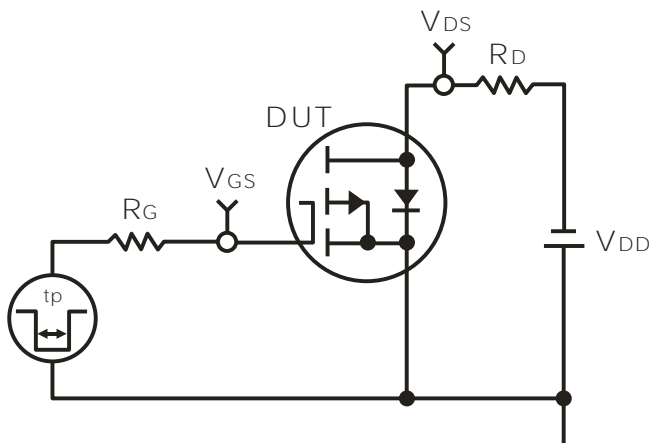

Gate Charge Test Circuit

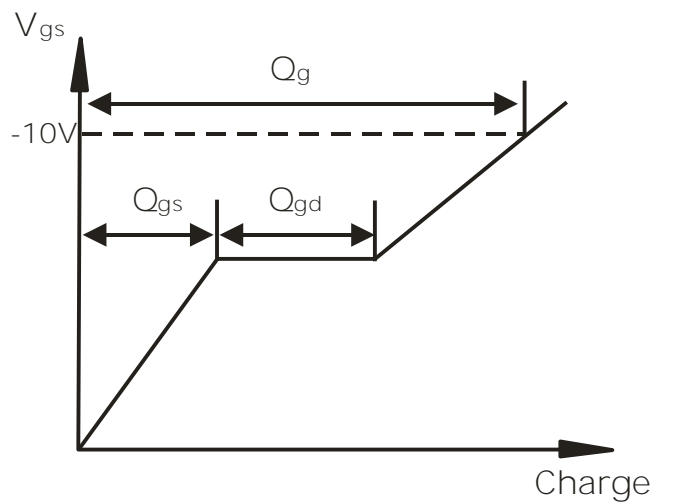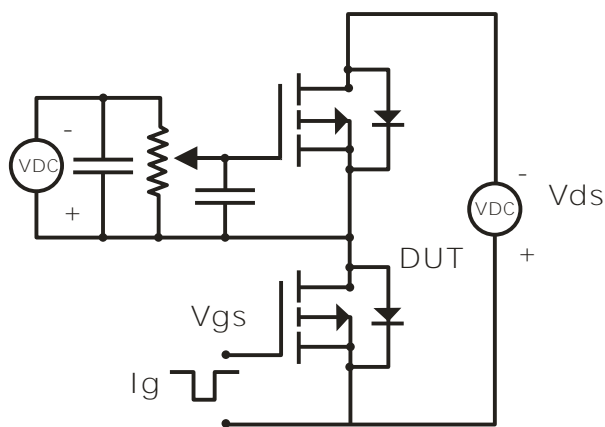


Device Per Unit

Package Type	Unit	Quantity
PDFN8L(5x6)	Reel	5000


Package Information

PDFN8L(5x6)

(unit:mm)

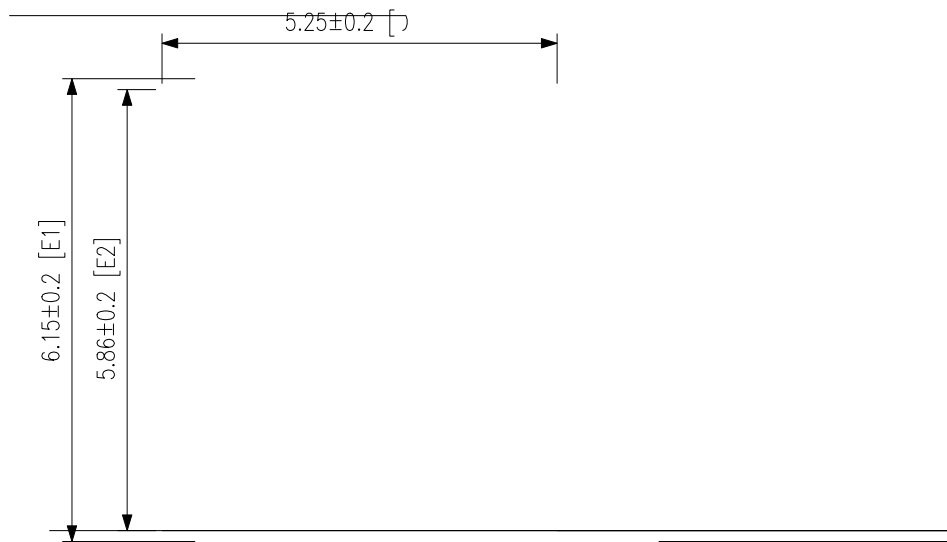

Classification Profile

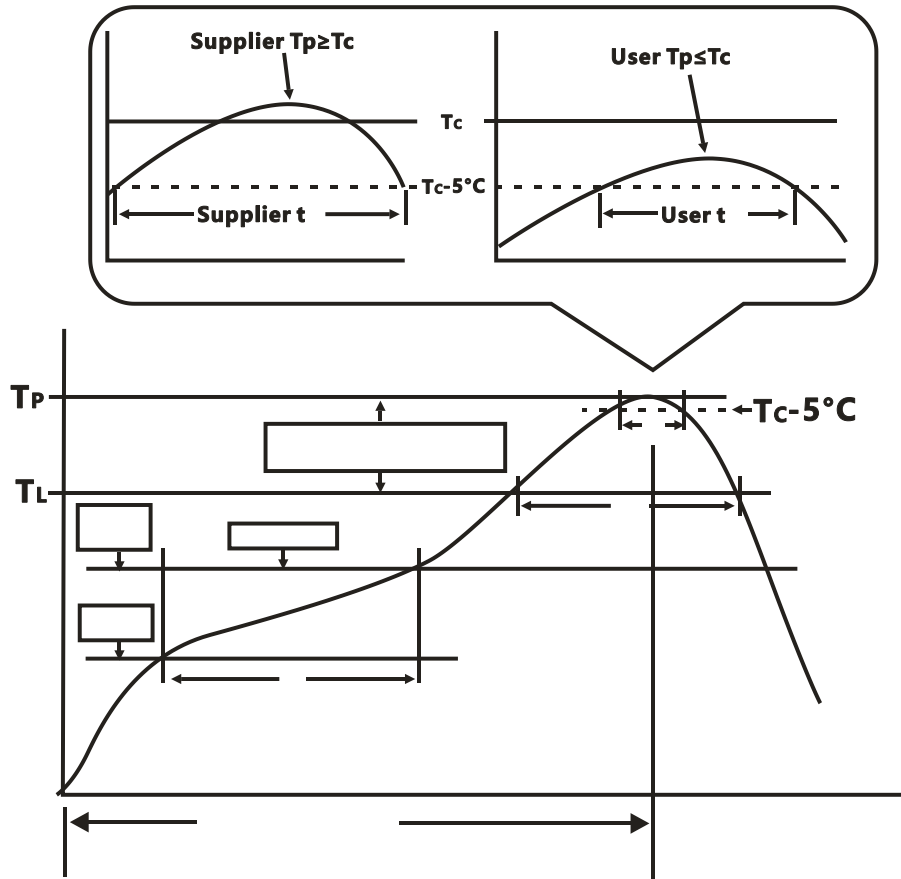

Classification Reflow Profiles

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat & Soak		
Temperature min (T _{min})	100 °C	150 °C
Temperature max (T _{max})	150 °C	200 °C
Time (T _{min} to T _{max}) (t _s)	60-120 seconds	60-120 seconds
Average ramp-up rate (T _{smax} to T _P)	3 °C/second max.	3°C/second max.
Liquidous temperature (T _L)	183 °C	217 °C
Time at liquidous (t _L)	60-150 seconds	60-150 seconds
Peak package body Temperature (T _P)*	See Classification Temp in table 1	See Classification Temp in table 2
Time (t _P)** within 5°C of the specified classification temperature (T _C)	20** seconds	30** seconds
Average ramp-down rate (T _P to T _{smax})	6 °C/second max.	6 °C/second max.
Time 25°C to peak temperature	6 minutes max.	8 minutes max.



*Tolerance for peak profile Temperature (T_p) is defined as a supplier minimum and a user maximum.

FAX: (86-029) 86685705

E-mail: sales@hymexa.com

Web net: <http://www.hymexa.com/>